

NOTES:

1. All dimensions specified as "AFFL" are to the bottom of socket.
2. Please compare all electrical and water connections with existing one. Some existing connections have been annotated as such, however, others would need to be confirmed on site.
3. Please supply all socket plates in polished chrome finish, to match with client's existing one. Please discuss with client if they would like USB connections with some of their sockets.
4. Please discuss with client if LED under-wall-cab lighting can be added to same lighting ring as pendant lights.

APPLIANCES:

1. Ovens - HB878GBB6B & HN878G4B6B
2. Hob - EX975LVV1E
3. Warming Drawers - 2x BI830CNB1B
4. DW - 1x client supplied and 1x SN878D26PE
5. Extractor - Westin CACHE1100
6. Fridge/Freezer - Client supplied
7. WM & Dryer - Client supplied
8. Quooker tap and Cube unit


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm

Ovens installation note

The fitted cabinet must not have a back panel behind the appliances. There should be a gap of at least 35 mm between the wall and the cabinet base as well as the rear panel of the cabinet situated above.
Ventilation slots and intake openings must not be covered.

Warming Drawers installation note

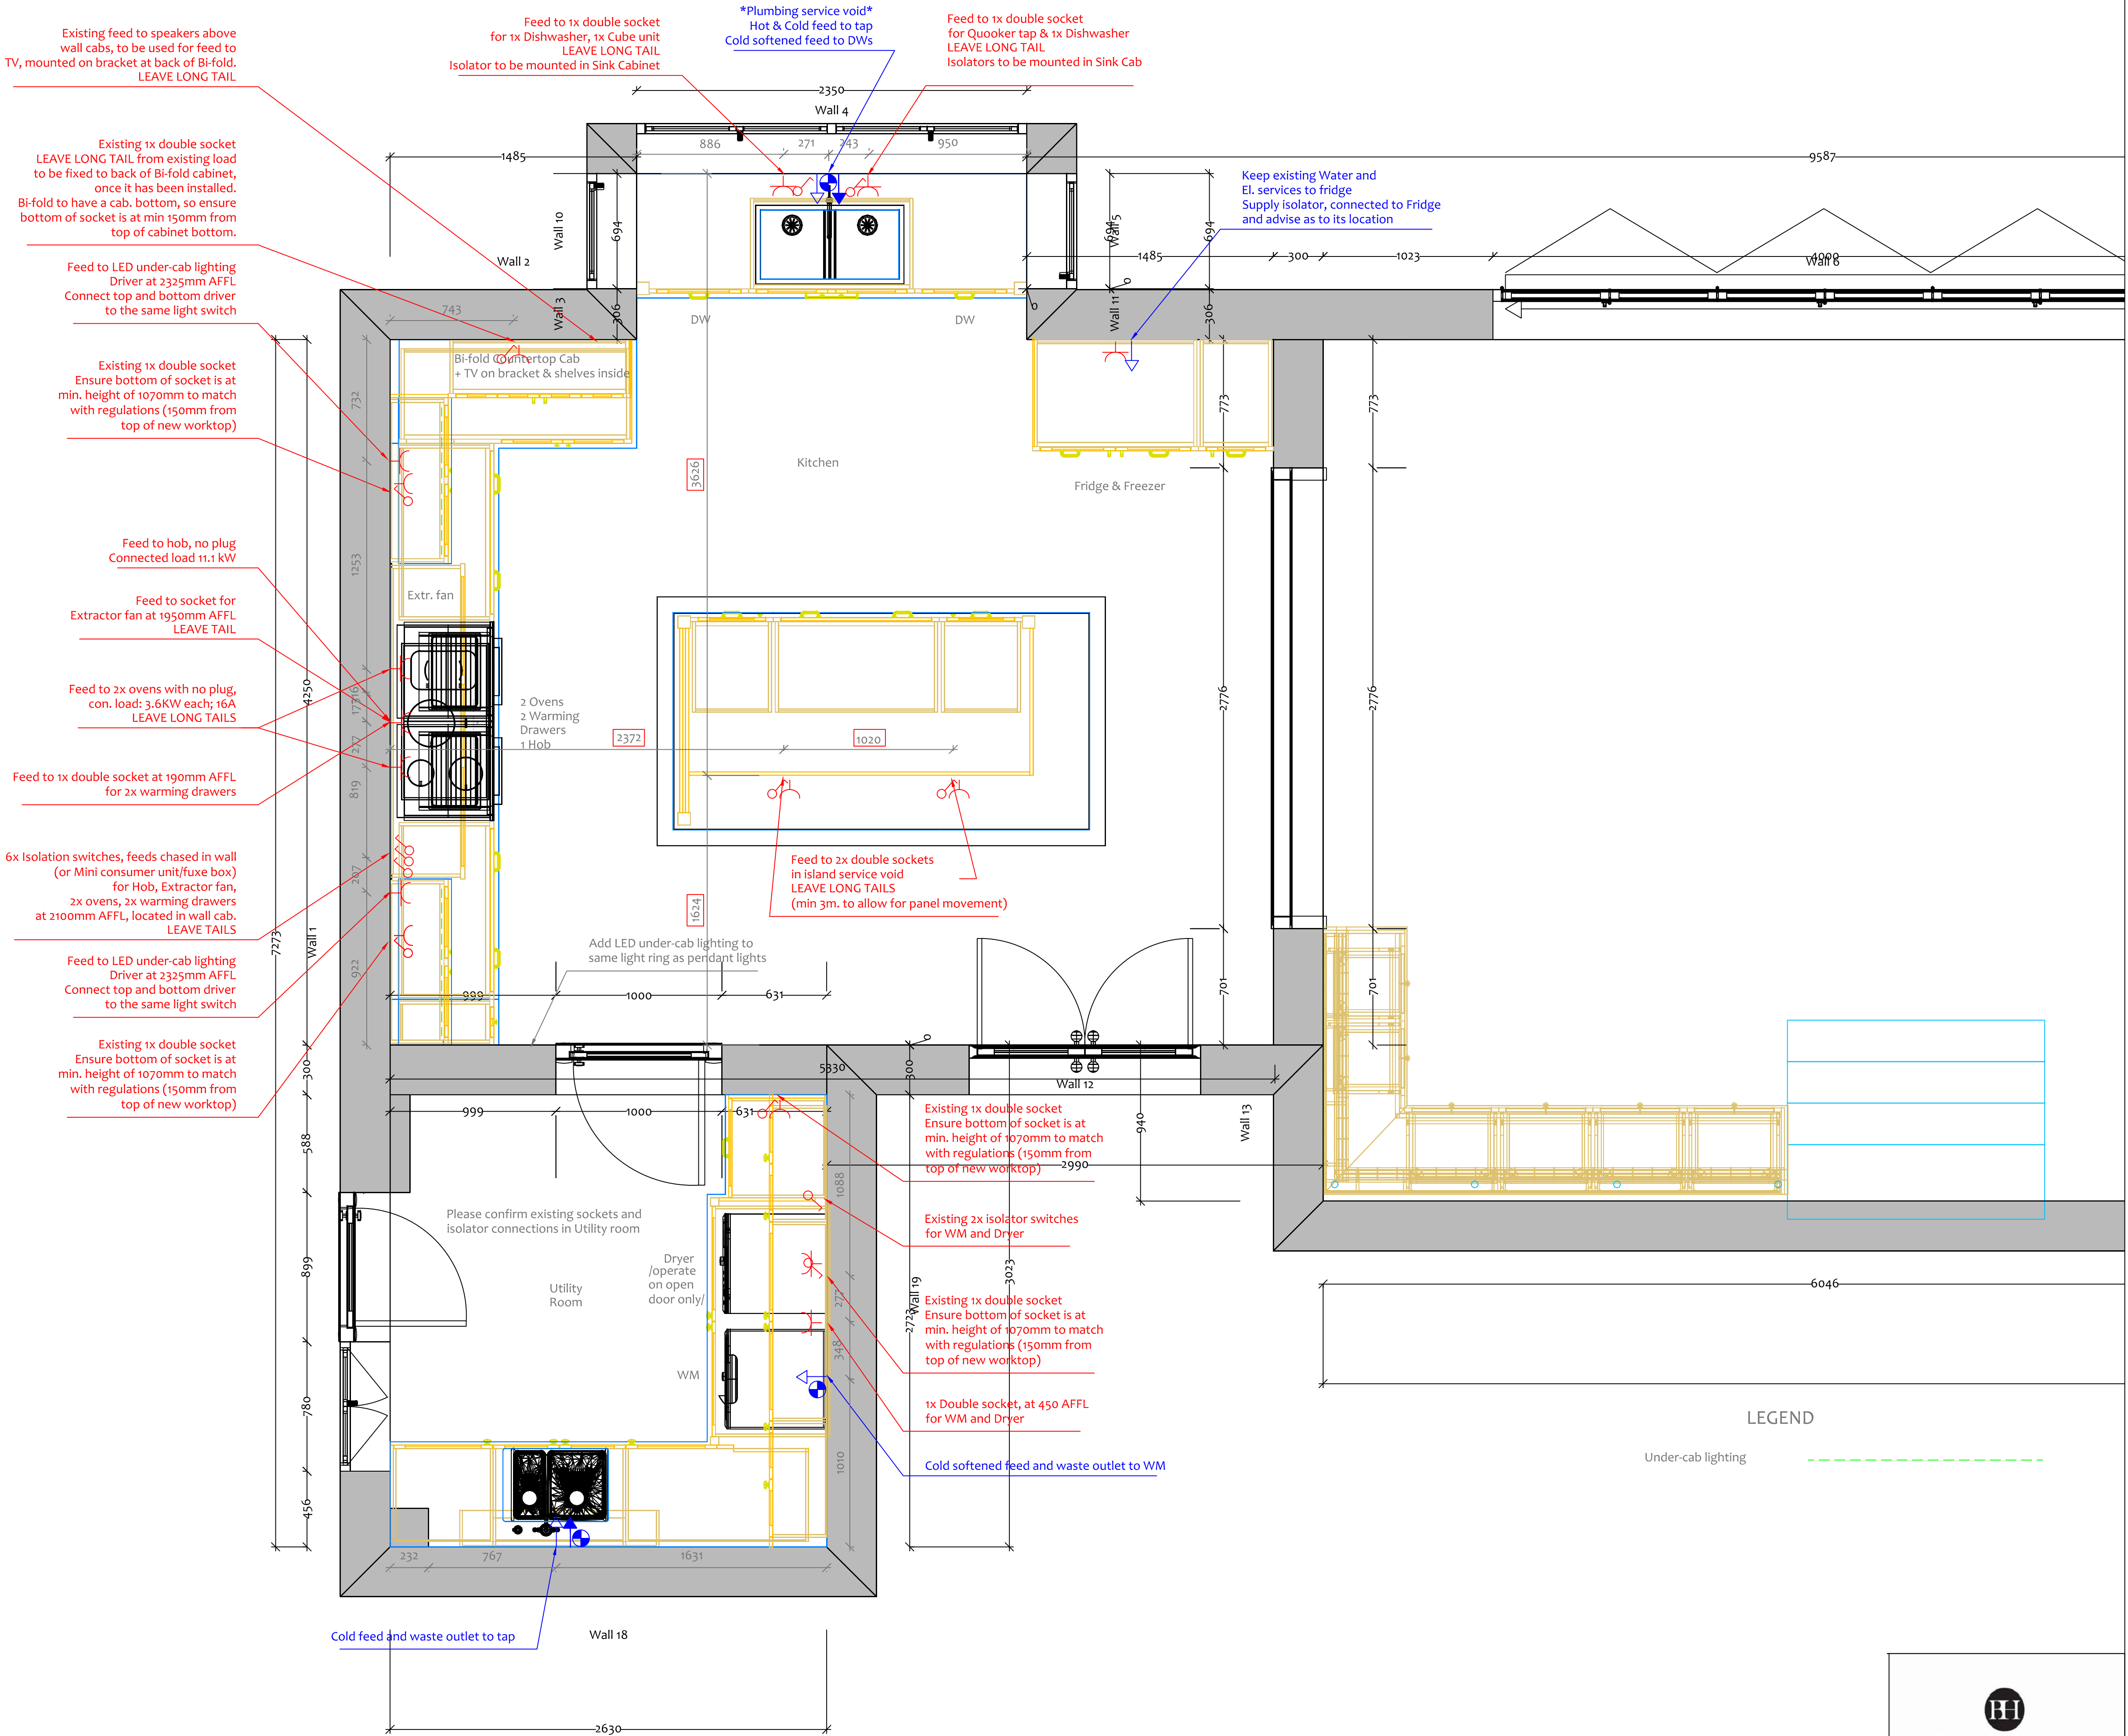

LEGEND

Under-cab lighting